




FOLIANT Gulliver C 520A

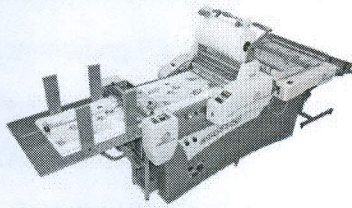

FOLIANT Gulliver C 520A

 [11. Foliant Gulliver C 520A Datasheet \(651.69 kB\)](#)

 [FOLIANT Gulliver C 520A video](#)

The FOLIANT Gulliver C 520A is a fully automatic industrial laminating machine (feeder, laminator and separator) equipped with a pneumatic system of laminating rollers pressure with an easy thrust control. A small compressor is integrated inside the machine frame. The machine has been designed with an operating width of 520 mm and it represents an ideal choice for professional single side lamination in small and medium sized printing shops). **Maximum speed is up to 15 meters/min.**

Maximum speed	15 m / min
Feeding	Automatic
Feeding system	Vacuum belt
Feeder's load capacity	35 cm
Overlaps control	In-Run Screw control
Overlaps accuracy	+ / - 2 mm
Separation	Automatic
Paper weight	115 - 350 g/m ²
Main roller pressure	Pneumatic
Integrated compressor	Included
Min. sheets size (w x l)	30 x 25 cm
Max. sheets size (w x l)	52 x 74 cm
Max. performance	1300 B2 / h
Temperature control	80 - 140°C
Warming up time	5 min
Power supply	230 V AC, 50-60 Hz
Power	3500 W
Floor space (w x l)	100 x 350 cm
Weight	340 kg
Modular stand	Included
Jogger 530	Optional
Reception Unit 530	Optional
Decurl Roller	Optional
Max. Sheets size w Decurl Roller (w x l)	49 x 74 cm

The machine's main feature is a pneumatic pressure system in a heavy duty mechanism enabling to achieve a very high working pressure, one single phase 220 – 240 V supply cable, a small integrated compressor inside the machine frame (i.e. no external source of pressured air is required), a nice design and an easy machine operation. Due to high pressure system the laminator is suitable for laminating the digital printing machines outputs and due to its format it suitable for laminating the offset printed sheets B2+ size too (the largest format is 52 x 74 cm).

The machine is supplied with a modular stand covered with a nicely designed side panels as a standard accessory. An RU 530 Reception Unit and/or a Jogger 530 for storing the laminated sheets can be supplied as an option. The machine requires a minimum floor space of 100 x 350 cm (including the RU or Jogger).

Feeder

The FOLIANT Gulliver C 520A is equipped with a sophisticated vacuum belt rising pile (35 cm) front separation automatic sheet feeder which increases operating comfort of the machine and its performance. The feeder is equipped with an „in run“ overlaps control knob, a Becker vacuum pump and a capacitance control sensor. The Becker vacuum pump is used for sheets front airing and for vacuum belt. The overlaps are controlled in an „in-run“ mode. The accuracy is +/- 2 mm under-lap (in a constant speed). The feeder is fitted with a lifting plate and its capacity is a 35 cm pile of paper.

Laminator

The FOLIANT Gulliver C 520A laminator maximum sheet size is 52 x 74 cm. The minimum sheet size is 30 x 25 cm (A4). The roll of a film is mounted on an easy handle shaft with a film tension control breaker. The shaft capacity is up to 3000 m of the 24 - 31 microns film. The film holder unit is equipped with a trim slitter and a perforating wheel.

The laminating process is done between two laminating rollers - a highly polished chrome roller, and a lower hard rubber pressure roller. The laminating roller is heated with an infra-red heating spiral, with a sensitive contact temperature sensor. The pressure is pneumatically adjustable to achieve an extra high pressure between the laminating rollers. A small compressor is integrated inside the machine frame.

The laminating unit is equipped with an adjustable decurl unit with a blade for offset printed sheets decurling. It can be optionally extended with a decurl roller, see options.