

Series BW and BWU


Euroline



TECHNICAL INFORMATION ►

Euroline – optimized for in- or off-line garbage bag production

- Basic converting line for garbage bag production including a non driven C-folder
- In- or Offline configuration – with or without surface unwind
- Flexible unit, easy to operate and maintain
- Servo driven
- A combination of well proven FAS Converting units
- Sealing from two sides with single sealing bars
- Unique tensionless sealing system
- Optional equipped with – PP-insert and TU220 tape unit

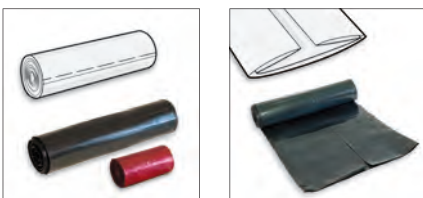



Technical data and process description

Euroline



This unit is optimized for garbage bag production, in- or off-line. Equipped with a non driven C-folder and single sealing bars as standard.


With FAS tensionless sealing operation and heating from two sides, it enables LLD, LD, MD, HD, recycled and biomaterial to be converted into a garbage bag on roll.

- Basic converting line for garbage bag production including a non driven C-folder
- In- or Offline configuration – with or without surface unwind
- Flexible unit, easy to operate and maintain
- Servo driven
- A combination of well proven FAS units
- Sealing from two sides with single sealing bars
- Unique tensionless sealing system
- Optional equipped with – PP-insert and TU220 tape unit

Technical data

	BW/BWU900	BW/BWU1100
Master roll max diameter, mm [in] ..	800 [31.5]	800 [31.5]
Web width sealing max, mm [in]	860 [33.9]	1060 [41.7]
Bag length, min-max, mm [in]	600-3000 [23.6-118]	600-3000 [23.6-118]
Machine speed, m/min [fpm]*	20-100 [65.6-328]	20-100 [65.6-328]
C-folding, mm [in]	220-620 [8.7-24.4]	220-620 [8.7-24.4]
Cycles/min, max	160	160
Web width winding, mm [in]	100-500 [3.9-19.7]	100-500 [3.9-19.7]
Roll changes/min, max**	8	8
Max roll diameter, mm [in]	200 [7.9]	200 [7.9]
Installed power, kW [A]	5 [9]	5 [9]
Air supply, bar [psi]	6, 13 lt/roll change [87 at 3.7 scfm]	6, 13 lt/roll change [87 at 3.7 scfm]
L x W x H, mm [in] BW	3228 x 1980 x 2356 [127 x 78 x 93]	3327 x 2157 x 2356 [131 x 85 x 93]
L x W x H, mm [in] BWU	4388 x 1989 x 2356 [173 x 78 x 93]	4487 x 2157 x 2356 [177 x 85 x 93]
Weight, kg [lbs] BW	2070 [4554]	2270 [4994]
Weight, kg [lbs] BWU	2510 [5522]	2540 [6350]

* Mechanical. Max production speed depending on material to be converted. ** With tape unit TU220 max 6/min.

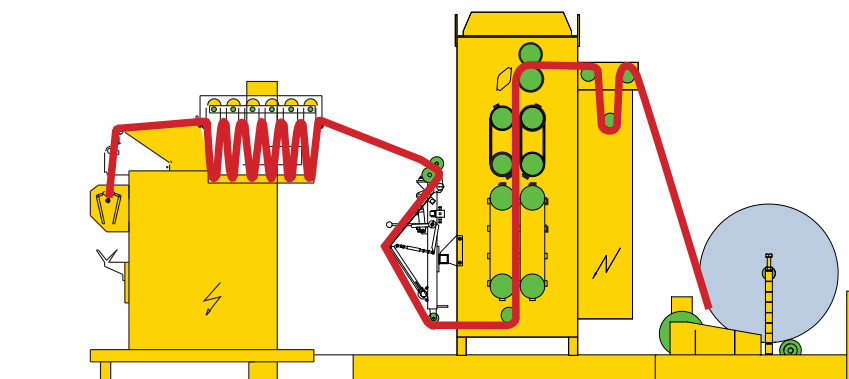

All capacity data depending on the quality of the material to be converted.



FAS Converting Machinery AB
Virvelvägen 5.
SE-232 36 Ärlöv, Sweden.
Phone: +46 (0)411 692 60.
Fax: +46 (0)411 127 40.
sales@fasconverting.com
www.fasconverting.com



PECO Inc.
2 Stewart Place.
P.O. Box 1346, NJ 07004, USA.
Phone: +1 973 882 0512.
Fax: +1 973 882 0915.
info@pecofas.com
www.fasconverting.com

Further technical details at
www.fasconverting.com