SOL
STEINFLOW®
THERMAL PROCESSING

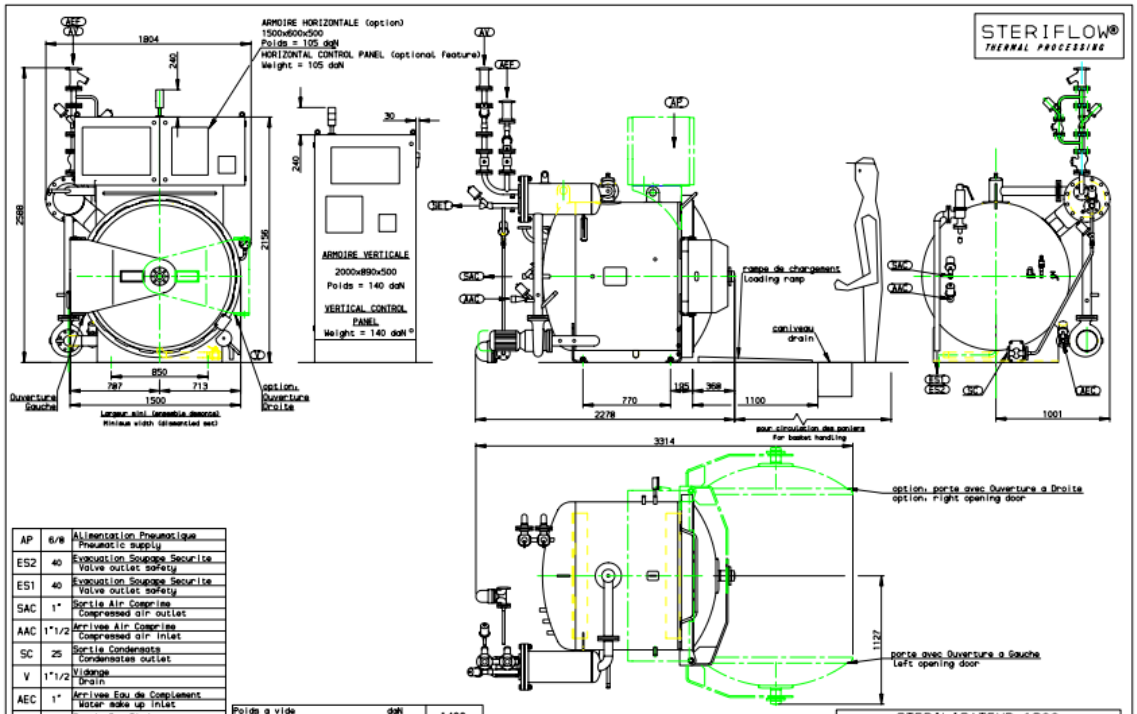

AP	6/8	Alimentation Pneumatique / Pneumatic supply
ES2	40	Evacuation Soupape Securite / Valve outlet safety
ES1	40	Evacuation Soupape Securite / Valve outlet safety
SAC	1"	Sortie Air Comprime / Compressed air outlet
AAC	1"1/2	Arrivee Air Comprime / Compressed air inlet
SC	25	Sortie Condensats / Condensates outlet
V	1"1/2	Vidange / Drain
AEC	1"	Arrivee Eau de Complement / Water make up inlet
SET	1"1/4	Sortie Eau Tiede / Warm water outlet
AEF	32	Arrivee Eau Froide / Cold water inlet
AV	32	Arrivee Vapeur / Steam inlet
Rep	DN	Fonction
TYPE DE RACCORDEMENT - CONNECTION DETAIL		

Poids a vide / Empty net weight daN	1400
Poids en fonctionnement / Total weight daN	2500
Poids plein d'eau / Weight full of water daN	4000
Capacite / Capacity dm³ (L)	2000
Poids sous emballage maritime / Gross weight daN	3500

Nota: Les dimensions sont donnees a titre indicatif sous reserve de toutes modifications
Dimensions are given for information only, with reserve of any modification

LFB: Liste de fourniture de BARRIQUAND
BARRIQUAND supply List

Ce document est la propriete de BARRIQUAND STERIFLOW et ne peut etre reproduit ou communique sans son autorisation.
This document is BARRIQUAND STERIFLOW property and can not be reproduced or communicated without his autorisation

Plan Indu dim. -